

Check Valves | 2882 - DN14 Dual Check Valve

Features

- ✓ Easy to insert
- ✓ 100% factory tested for sealing operation
- ✓ low headloss
- ✓ low cracking pressure
- ✓ External oring groove
- ✓ Spring loaded plunger

Check Valve External Dimensions

OD#1	13.80
ID	8.20
Height	32.00


Materials

Inner Core	Acetal
Plunger	Acetal
Body	Acetal
Spring	304 S/S
Seal	VMQ 70
O'ring	VMQ 70

FLOW RATE CURVE

RATED FLOW vs PRESSURE LOSS

Pressure loss DN14 Dual Check

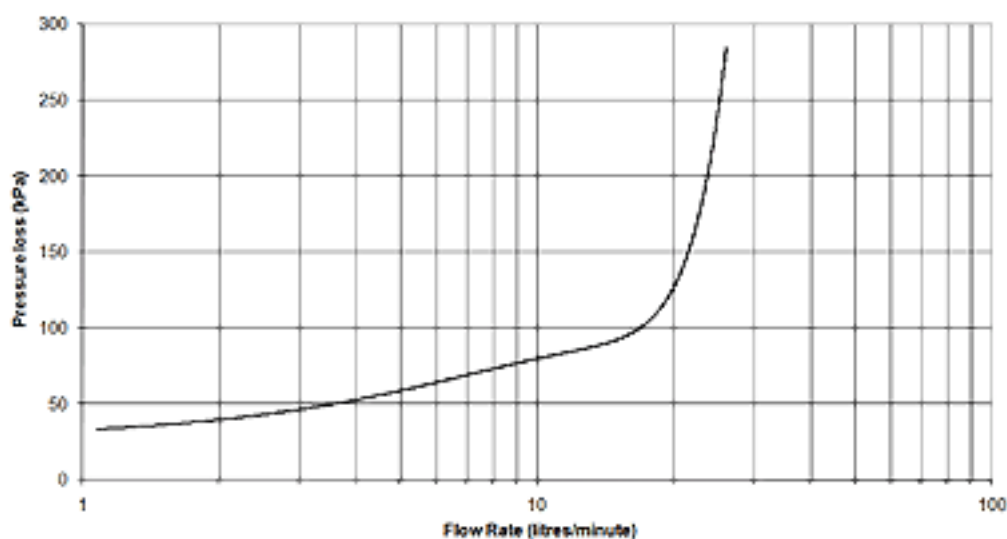

Certification

Potable Water	AS4020
---------------	--------

Performance

Technical Data

Service Temperature

Max C	90
-------	----

Min C	0
-------	---

Service Pressure

Max Kpa	2000
---------	------

Min Kpa	0
---------	---

Fluid	Clean Water
-------	-------------

Opening Pressure

