

Check Valves | 2891 - DW20 Check Valve

Features

- Easy to insert
- 100% factory tested for sealing operation
- low headloss
- low cracking pressure
- External oring groove
- Spring loaded plunger

Check Valve External Dimensions

OD#1	19.80
ID	12.40
Height	17.50


Materials

Outer Cap	Acetal
Inner Core	Acetal
Plunger	Acetal
Body	Acetal
Spring	304 S/S
Seal	VMQ 70
O'ring	VMQ 70

FLOW RATE CURVE

RATED FLOW vs PRESSURE LOSS

Pressure Loss DW20

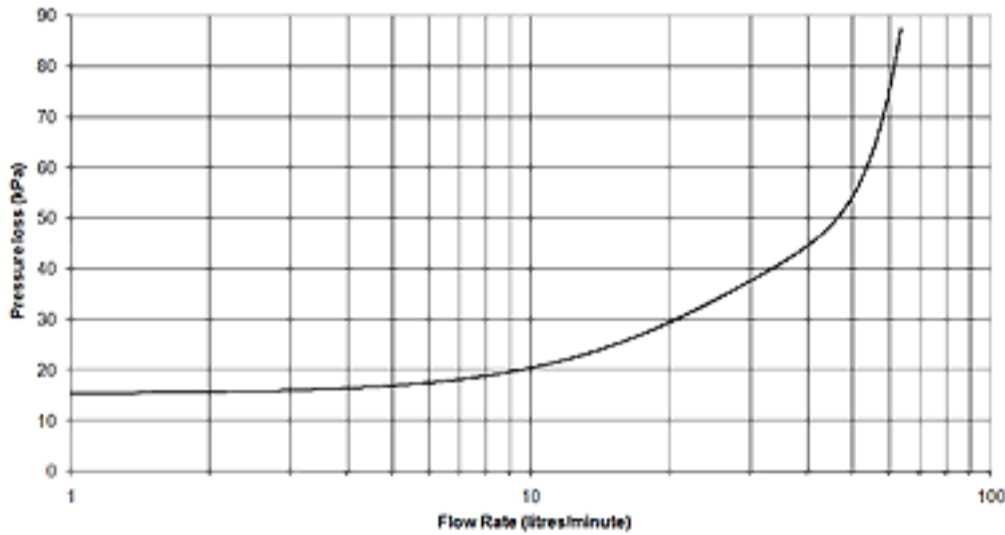

Certification

Potable Water	AS4020
---------------	--------

Performance

Technical Data

Service Temperature	
Max C	90
Min C	0
Service Pressure	
Max Kpa	2000
Min Kpa	0
Fluid	Clean Water
Opening Pressure	

