

Features

- ✓ Easy to insert
- ✓ 100% factory tested for sealing operation
- ✓ low headloss
- ✓ low cracking pressure
- ✓ External oring groove
- ✓ Spring loaded plunger

Check Valve External Dimensions


| | |
|--------|-------|
| OD#1 | 10.00 |
| ID | 5.80 |
| Height | 10.50 |

Materials

| | |
|------------|------------|
| Outer Cap | |
| Inner Core | PP |
| Plunger | PP |
| Body | PP |
| Spring | 316 S/S |
| Seal | Santoprene |
| O'ring | EPDM 5711 |

FLOW RATE CURVE

Pressure Loss Single Check DW10PP

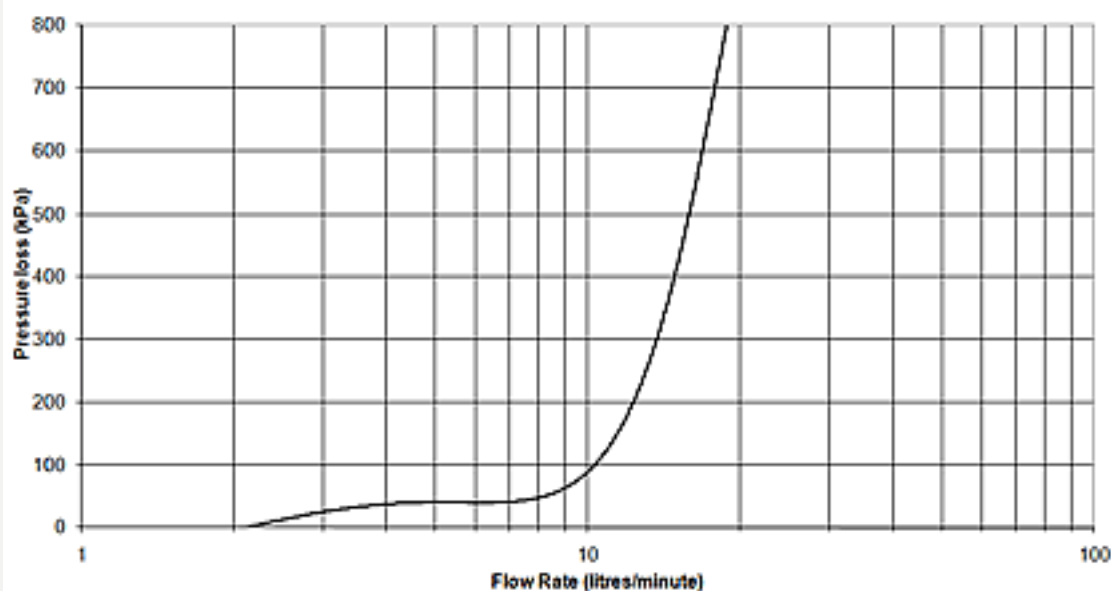

Certification

Potable Water

Performance

Technical Data

Service Temperature

| | |
|-------|----|
| Max C | 40 |
| Min C | 0 |

Service Pressure

| | |
|---------|-----|
| Max Kpa | 500 |
| Min Kpa | 0 |

Fluid Clean water

Opening Pressure

